

Henderson Round Sliding Door Handle Set with Door Edge Pull

1. Prepare door panel as shown in Diagram 1.
2. Using a chisel, remove the shaded area shown in Diagram 1.
3. In order to prevent any rotation of the flush pulls, we advise applying silicone or suitable wood glue on the interior angle, as shown in Diagram 2.
4. Fit the flush pulls into the 48mm holes.
5. Fix the finger pulley into the 25mm diameter hole in the edge of the door, as shown in Diagram 1.

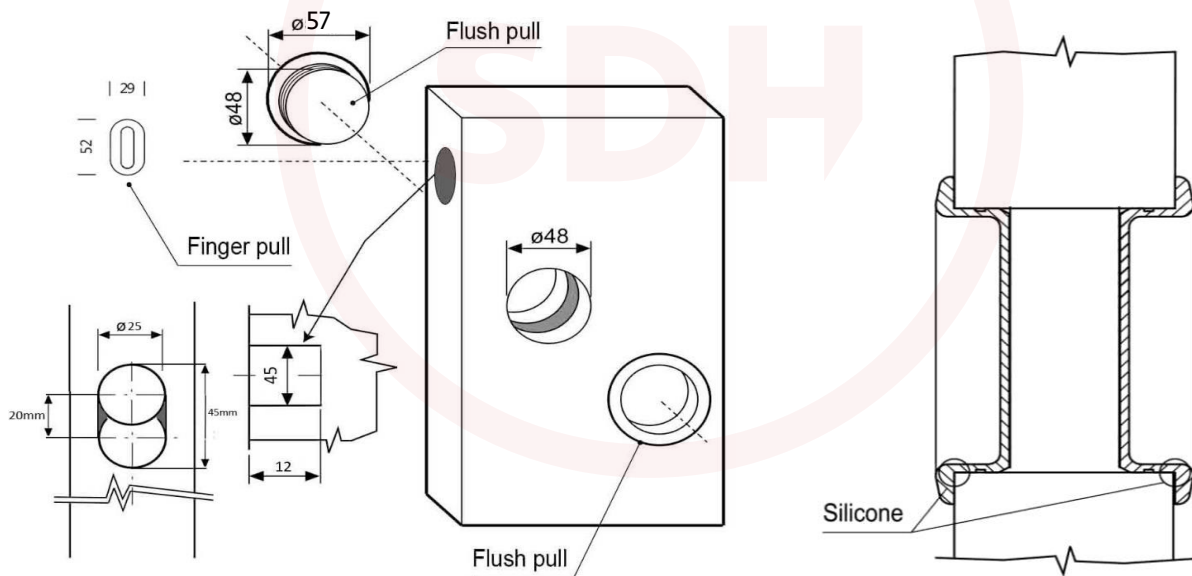


Diagram 1. Drilling dimensions

Diagram 1. Flush pull assembly