


# Trimvent<sup>®</sup> Select Xtra R16 (TVSXR16)

**Fixing Instructions** 

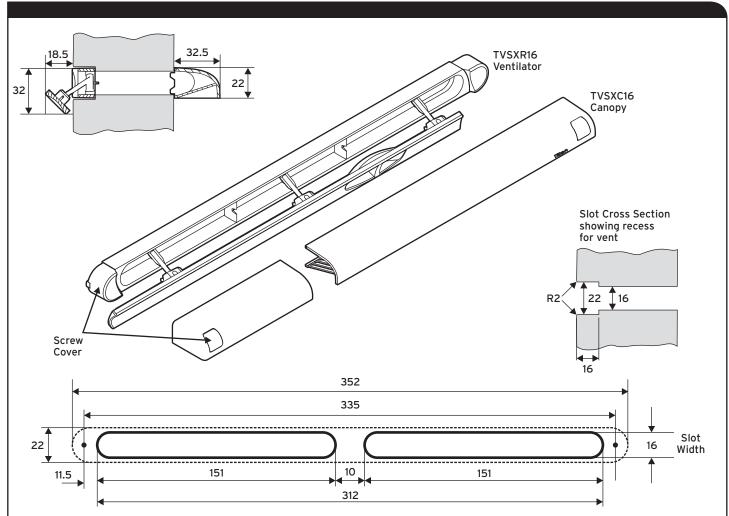

N.B. Any significant variation of the applications shown will affect the EA performance of the product combination.

### Instructions

Prepare slots and pre-drill fixing holes, avoiding glazing rebates.
 Fix vent (with snib on the right) and canopy using screws and attach screw covers.

### DO NOT OVER TIGHTEN SCREWS!

Recommended screws: Vent & Canopy: 3.5mm (No.6) Pan head or equivalent.

We recommend use of silicone sealant along the canopy sealant groove.


If vent supplied with protective cover tape, do not remove tape until authorised.

	Other Details			
	Dimensions	XR16	XC16	
	Overall Length	351	364	
	Equivalent Area (EA) - Screw Fix**	4600	0mm²	
	Free Area (Screw Fix)	4523mm <sup>2</sup>	4990mm <sup>2</sup>	

\*\* Tested in accordance with BS:EN 13141-1 (2004).

#### Silicone Sealant Application

For improved weathering apply silicone here




\* All dimensions in mm unless otherwise stated.



# Trimvent<sup>®</sup> Select Xtra HD16 (TVSXHD16)

## **Fixing Instructions**

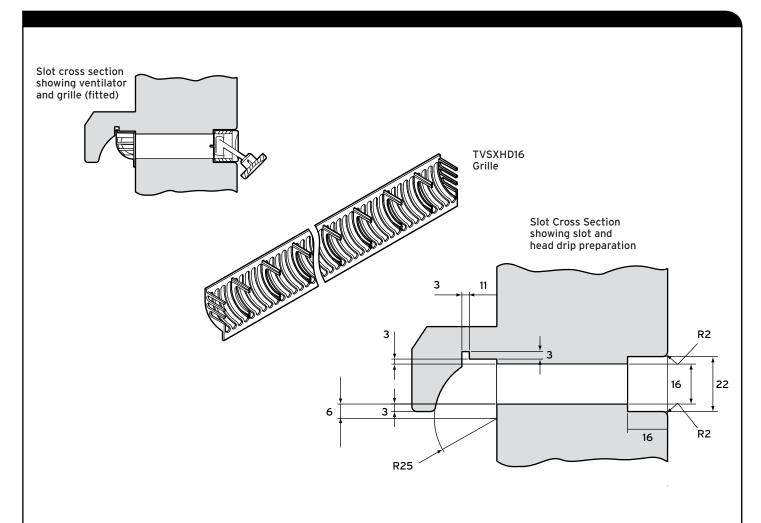

N.B. Any significant variation of the applications shown will affect the EA performance of the product combination.

Instructions	Other Details		
This product is designed to be used with the Trimvent Select Xtra R16	Dimensions	XR16	XHD16
intilator.	Overall Length	351	358
See reverse for Ventilator fixing instructions.	Equivalent Area (EA) - Screw Fix**	4600mm <sup>2</sup>	
<ul> <li>Position grille centrally over slots and locate grille upstand in groove n underside of head drip.</li> </ul>	Free Area (Screw Fix)	4523mm <sup>2</sup>	5345mm²
	** Tested in accordance with BS:EN 13141-1 (2004).		
<b>2.</b> Secure grille to frame using pins or staples of appropriate material.			2004).
Grille is moulded in polypropylene; care should be taken to ensure that timber finishes or processes do not affect the integrity of grille.			
To maintain Equivalent Area when tested with TV Select XR16 slot and underside of head drip should be manufactured in accordance with dimensions supplied by Titon.			
If vent supplied with protective cover tape, do not remove tape until authorised.			

 $\ast$  All dimensions in mm unless otherwise stated.