

Technical Details

FAB Single Handle French Door Lock

High security locking without the need for 2 handles, 2 cylinders or a dummy mullion.




The Slave lock is operated by a flush, integrated two way lever. The FAB slave lock throws two heavy duty 20mm shootbolts into the head and cill. Combined with the renowned Thunderbolt multi-point lock on the master door with its two tapered dead bolts which penetrate the FAB slave lock which secures the two leafs together. The Slave lock is also a one piece adjustable keep.

The Winkhaus FAB slave door lock range provides a high security locking option that is tested and approved.

- Twin Dead Bolts opposed to hooks avoiding catching issues
- Slave bolt U Rail measures 26mm by 5.5mm high
- 20mm Face plate and 45mm backset, 35 available
- Heavy Duty Adjustable SDK single thimble keeps for slave door lock
- Adjustable on ever locking point
- Handed system. Refer to handing details

SECTION DRAWING

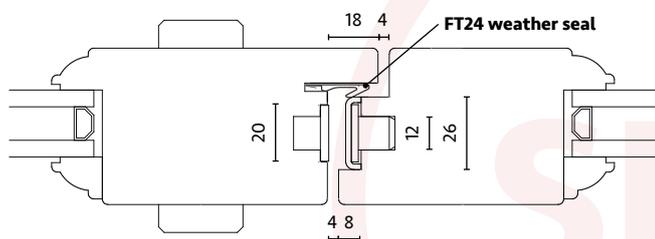


System can accommodate different sections than shown above. Please contact our sales team for any further advice.

Please Note: Section drawings are just an example and not a specification.

LOCK COMPONENTS

REF	PART NO.	DESCRIPTION	QUANTITY
Master Lock			
1	WK-FABM45-2	5 point Master Door Lock 45mm B/S 2100x20mm F/P Square End	1
Slave Locks			
2	WKFAB-SLM-LH	Slave Flush Lock includes bottom shoot Left Hand	1 or
2	WKFAB-SLM-RH	Slave Flush Lock includes bottom shoot Right Hand	1
Shootbolts			
3	WK-FAB-SLS-2	Slave Unit Shootbolt, 256mm, doors 1856-1996mm	1 or
3	WK-FAB-SLS-3	Slave Unit Shootbolt, 399mm, doors 1996-2139mm	1 or
3	WK-FAB-SLS-4	Slave Unit Shootbolt, 541mm, doors 2139-2281mm	1
Shootbolt Keep			
4	SDH-SK-HD	22mm Single Shootbolt Keep	2

TECHNICAL DETAILS

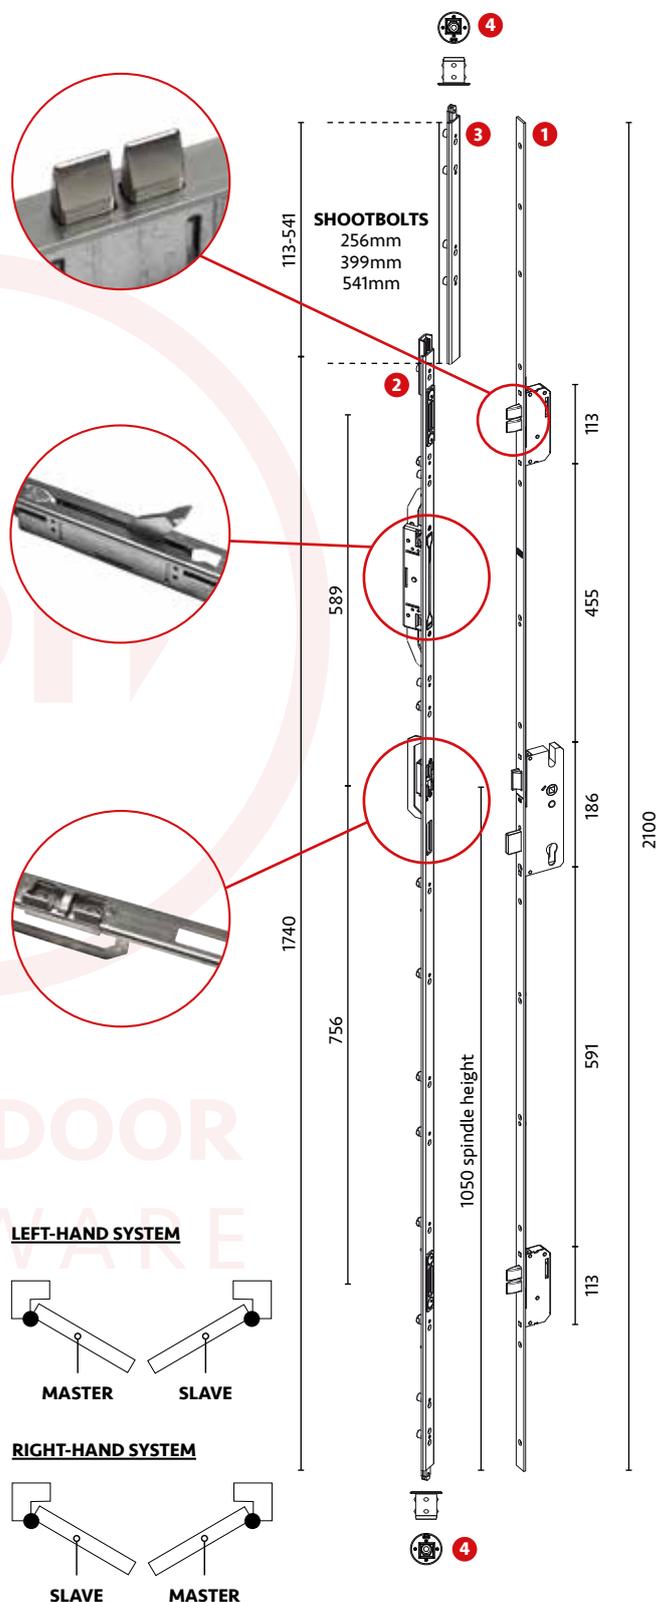

10 YEAR MECHANICAL GUARANTEE

OTHER SIZES CAN BE ACHIEVED. PLEASE CALL SALES FOR MORE INFO.

